


BELKIN®

IEEE 1394 PCMCIA CARDBUS

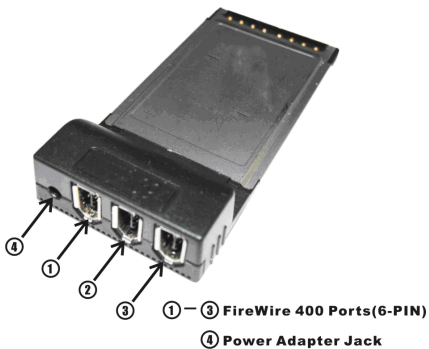

Features and Benefits

- Compliant IEEE 1394-1995, 1394a (rev. 1.1) and OHCI Interface Specification 1.0
- PCMCIA CardBus Interface with Power Management
- Hot-swapping features allows you to connect/disconnect devices without powering down your system
- Supports data transfer rates of 100, 200 and 400 Mbps
- Built-in power jack for optional power supply*
- Provides three 1394a (6-pin) port for multiple 1394b/1394a devices connections
- Works with various types of 1394a devices including portable hard disk, DV camcorder, digital camera, CD-RW/DVD-ROM drive and other audio/video devices
- Supports Windows® 2000, XP/2003 32/64bit, Vista 32/64bit

* power supply is not included

Bus Interface

- 32-bit PCMCIA Type II

System Requirements


- Windows® 2000/XP/Server 2003/Vista
- Available CardBus Type II Slot

Connectors

- 3 x external IEEE 1394A 6-pin connectors

Package Contents

- 1 x IEEE 1394 PCMCIA CARDBUS
- 1 x User Manual

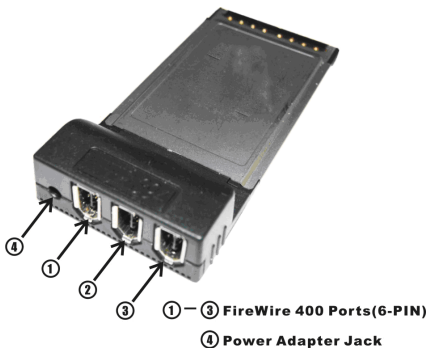

Hardware Description

CAUTION:

Use only switching power adapter* with following specifications:

- Switching power adapter (Optional) DC 12V, 3A
Polarity: Outside negative voltage(-) & Inside positive voltage(+)
3.5mm power jack



The 3-Port IEEE 1394 CardBus Adapter has sufficient power to support self-powered devices. For bus-powered devices, it needs an external power adapter (DC 12V, 3A) to provide extra power to the devices.

* power supply is not included

Hardware Installation

General instructions for installing the card are provided below. Since the design of system may vary, refer to your system's reference manual for further information, if needed.

1. Power off your notebook computer.
2. Insert the IEEE 1394 PCMCIA CARDBUS into the Type II PC Card slot of your notebook computer. Make sure it is inserted all the way in for a solid connection.
3. Power on your notebook computer.

Driver Installation

Windows® 2000/XP/Vista will automatically detect and install the correct driver for the IEEE 1394 PCMCIA CARDBUS. Make sure that the driver has been installed correctly, right click My Computer, then click Manage, click Device Manager. The Device Manager window opens. Scroll to the IEEE 1394 Bus host controller icon and click on the plus symbol, the VIA OHCI Compliant IEEE 1394 Host Controller should be displayed.

Free Tech Support* *National call rates may apply www.belkin.com

You can find additional support information on our website www.belkin.com/europe-powersupply through the tech-support area. If you want to contact technical support by phone, please call the number you need from this list*.

COUNTRY	NUMBER	INTERNET ADDRESS
AUSTRIA	0820 200766	www.belkin.com/
BELGIUM	07 07 00 073	www.belkin.com/
CZECH REPUBLIC	239 000 406	www.belkin.com/
DENMARK	701 22 403	www.belkin.com/
FINLAND	00800 - 22 35 54 60	www.belkin.com/
FRANCE	08 - 25 54 00 26	www.belkin.com/
GERMANY	0180 - 500 57 09	www.belkin.com/
GREECE	00800 - 44 14 23 90	www.belkin.com/
HUNGARY	06 - 17 77 49 06	www.belkin.com/
ICELAND	800 8534	www.belkin.com/
IRELAND	0818 55 50 06	www.belkin.com/
ITALY	02 - 69 43 02 51	www.belkin.com/
LUXEMBOURG	34 20 80 85 60	www.belkin.com/
NETHERLANDS	0900 - 040 07 90 €0.10 per minute	www.belkin.com/
NORWAY	81 50 0287	www.belkin.com/
POLAND	00800 - 441 17 37	www.belkin.com/
PORTUGAL	707 200 676	www.belkin.com/
RUSSIA	495 580 9541	www.belkin.com/
SOUTH AFRICA	0800 - 99 15 21	www.belkin.com/
SPAIN	902 - 02 43 66	www.belkin.com/
SWEDEN	07 - 71 40 04 53	www.belkin.com/
SWITZERLAND	08 - 48 00 02 19	www.belkin.com/
UNITED KINGDOM	0845 - 607 77 87	www.belkin.com/
OTHER COUNTRIES	+44 - 1933 35 20 00	

EU DECLARATION OF CONFORMITY

 Český (Czech)	<i>[Belkin Ltd]</i> tímto prohlašuje, že tento <i>[F5D8635-4]</i> je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
 Dansk (Danish)	Undertegnede <i>[Belkin Ltd]</i> erklærer herved, at følgende udstyr <i>[F5D8635-4]</i> overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
 Deutsch (German)	Hiermit erkläre <i>[Belkin Ltd]</i> , dass sich das Gerät <i>[F5D8635-4]</i> in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
 Eesti (Estonian)	Käesolevaga kinnitab <i>[Belkin Ltd]</i> seadme <i>[F5D8635-4]</i> vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
 English	Hereby, <i>[Belkin Ltd]</i> , declares that this <i>[F5D8635-4]</i> is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
 Español (Spanish)	Por medio de la presente <i>[Belkin Ltd]</i> declara que el <i>[F5D8635-4]</i> cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
 Ελληνική (Greek)	ΜΕ ΤΗΝ ΠΑΡΟΥΣΙΑ <i>[Belkin Ltd]</i> ΔΗΛΩΝΩ ΟΤΙ <i>[F5D8635-4]</i> ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
 Français (French)	Par la présente <i>[Belkin Ltd]</i> déclare que l'appareil <i>[F5D8635-4]</i> est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
 Italiano (Italian)	Con la presente <i>[Belkin Ltd]</i> dichiara che questo <i>[F5D8635-4]</i> è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
 Latviski (Latvian)	Ar šo <i>[Belkin Ltd Belkin Ltd]</i> deklarē, ka <i>[F5D8635-4 / iekārtas tips]</i> atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
 Lietuvių (Lithuanian)	Šiuo <i>[Belkin Ltd]</i> deklaruoją, kad šis <i>[F5D8635-4]</i> atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
 Nederlands (Dutch)	Hierbij verklaart <i>[Belkin Ltd]</i> dat het toestel <i>[F5D8635-4]</i> in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
 Malti (Maltese)	Hawn hekk, <i>[Belkin Ltd]</i> , jiddikjara li dan <i>[F5D8635-4]</i> jikkonforma mal-litigijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Direttiva 1999/5/EC.
 Magyar (Hungarian)	Alulírott, <i>[Belkin Ltd]</i> nyilatkozom, hogy a <i>[F5D8635-4]</i> megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
 Polski (Polish)	Niniejszym <i>[Belkin Ltd]</i> oświadczam, że <i>[F5D8635-4]</i> jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
 Português (Portuguese)	<i>[Belkin Ltd]</i> declara que este <i>[F5D8635-4]</i> está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
 Slovensko (Slovenian)	<i>[Belkin Ltd]</i> izjavlja, da je ta <i>[F5D8635-4]</i> v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
 Slovenský (Slovak)	<i>[Belkin Ltd]</i> týmto vyhlasuje, že <i>[F5D8635-4]</i> spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
 Suomi (Finnish)	<i>[Belkin Ltd]</i> vakuuttaa täten että <i>[F5D8635-4]</i> tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
 Svenska (Swedish)	Härmed intygar <i>[Belkin Ltd]</i> att denna <i>[F5D8635-4]</i> står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.
 Ísenska (Icelandic)	Hér með lýsir <i>[Belkin Ltd]</i> yfir því að <i>[F5D8635-4]</i> er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.
 Norsk (Norwegian)	<i>[Belkin Ltd]</i> erklærer herved at utstyret <i>[F5D8635-4]</i> er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

BELKIN®

IEEE 1394 PCMCIA CARDBUS

Belkin Ltd.
Express Business Park
Shipton Way, Rushden
NN10 6GL, United Kingdom

Belkin Iberia
C/ Anabel Segura, 10 planta baja, Of. 2
28108, Alcobendas, Madrid
Spain

Belkin SAS
130 rue de Silly
92100 Boulogne-Billancourt, France

Belkin Italy & Greece
Via Carducci, 7
Milano 20123
Italy

Belkin GmbH
Hanebergstrasse 2
80637 Munich
Germany

Belkin B.V.
Boeing Avenue 333
1119 PH Schiphol-Rijk, Netherlands

Please visit our website www.belkin.com for technical support or further information.

Disposal of Waste Equipment by Users in Private Households in the European Union:
For more information, go to www.belkin.com/environmental

© 2008 Belkin Corporation. All rights reserved. All trade names are registered trademarks of respective manufacturers listed. Mac OS and Mac are trademarks of Apple Computer, Inc., registered in the U.S. and other countries.

8820-00014